









# SOLAR MODULE EGE-150M-36 MONOCRYSTALLINE MODULE

150 W / 36 Cells / 5 Bus bars



Eco Green Energy's modules are only made of grade A solar cells with a very high efficiency and ensured more than 25 years lifespan.

### KEY FEATURES


-  5 bus bars cells, with efficiency up to 22.8 %
-  IP 67  
IP67 junction box for long term weather endurance
-  2400 Pa  
5400 Pa  
High quality aluminum frame, resisting load up to 5400 Pa and wind pressure up to 2400 Pa
-  High transmissivity, low-iron tempered glass
-  LOW LIGHT  
High performance in low-light environment
-  2  
E L  
Double EL test before and after lamination

### CERTIFICATES

IEC 61215 / IEC 61730 / IEC 61701/ CE / ISO 9001:2015 / PV CYCLE

### LINEAR PERFORMANCE WARRANTY

12-Year Product Warranty · 25-Year Linear Power Warranty

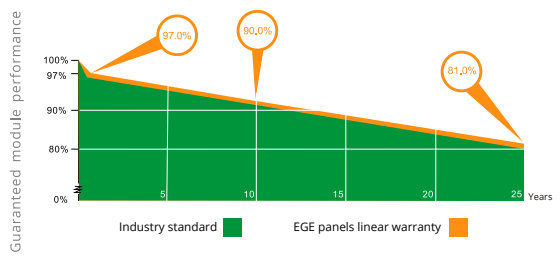

**25 YEARS** OUTPUT POWER WARRANTY

**12 YEARS** PRODUCT WARRANTY



## ELECTRICAL DATA AT STC\*

Power output (Pmax)	150 W
Power tolerance	0~+3 %
Module efficiency	17.79 %
Maximum power voltage (Vmp)	19.11 V
Maximum power current (Imp)	7.85 A
Open circuit voltage (Voc)	23.40 V
Short circuit current (Isc)	8.34 A

\*Standard Test Conditions: Irradiance: 1 000 W / m<sup>2</sup> •  
Cell temperature: 25°C • AM: 1.5

## ELECTRICAL DATA AT NOCT\*

Power output (Pmax)	111.84 W
Maximum power voltage (Vmp)	17.92 V
Maximum power current (Imp)	6.23 A
Open circuit voltage (Voc)	21.71 V
Short circuit current (Isc)	6.78 A

\*Nominal Operating Cell Temperature: Irradiance: 800 W / m<sup>2</sup> •  
Ambiant temperature: 20°C • AM: 1.5 • Wind speed: 1 m/s

## TEMPERATURE CHARACTERISTICS

NOCT	45 °C ±2 °C
Temperature coefficient of Pmax	-0.41%/°C
Temperature coefficient of Voc	-0.31%/°C
Temperature coefficient of Isc	+0.06%/°C


## MAXIMUM RATINGS

Operating temperature range	-45 °C ~+85 °C
Maximum system voltage	1500 V
Max series fuse rating	20 A
Max front load (e.g.: snow)	5400 Pa
Max back load (e.g.: wind)	2400 Pa


## MECHANICAL CHARACTERISTICS

Cell type	Monocrystalline (158.75x130 mm)
Number of cells	36
Dimensions	1240x680x30mm
Weight	9.5 kg
Glass	3.2 mm tempered glass
Frame	Anodized aluminium alloy
Junction box	IP67
Cable	0.9 m
Connector	MC4 or MC4 compatible

## I-V CURVES

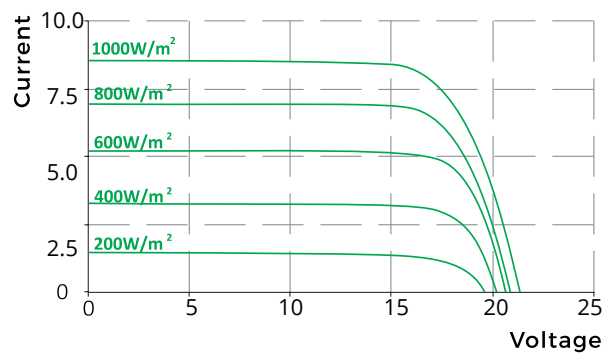

## ENGINEERING DRAWINGS (mm)

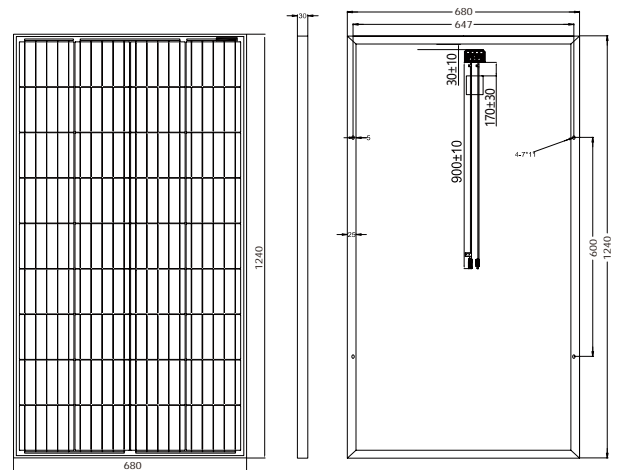

## PACKAGING

Type	Pcs/ Type	Weight
Per Box	2 pcs	20.0 kg
20ft GP Container	870 pcs	8.7 t
40ft GP Container	1858 pcs	18.6 t
40ft HQ Container	2056 pcs	20.6 t